

Description


Pall's UltiKleen filter is an advanced all-fluoropolymer cartridge that is highly recommended for critical chemical filtration. Prewet filters are guaranteed extractable levels and particle cleanliness levels. The UltiKleen KC Assembly is a completely disposable filter unit, consisting of an all fluoropolymer UltiKleen filter.

Features

- Utilizes an all fluoropolymer filter cartridge ensuring excellent effluent cleanliness
- Eliminates O-rings for KC assemblies
- Low differential pressure
- Low extractable
- Compatible with virtually all chemicals
- 100% integrity tested
- Available in In-line and T-flow styles
- High pressure and temperature capability

Operating Recommendations

- Available prewet as an option
- Proper wetting procedures should be followed if prewet option is not selected. IPA or other low surface tension wetting liquids need to be completely flushed prior to chemical contact.
- Must allow for proper venting

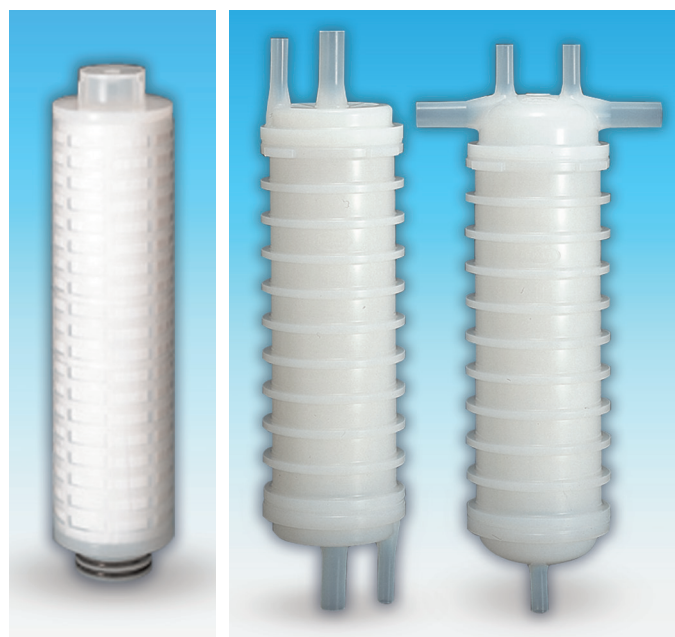

UltiKleen Filters

UltiKleen KC Assemblies

Specifications

Materials of Construction



Components	Materials
Filter Medium	PTFE
Media Support	PTFE / PFA
Inner Core / Outer Cage	PFA
End Caps	PFA
Sealing Methods	Melt seal
O-ring (for cartridge)	FEP Encapsulated fluoroelastomer
Housing (for KC type)	PFA

¹ All Fluoropolymer components made without PFOA.


Removal Ratings	FD	FT	FR	FX
		0.05 µm	0.1 µm	0.2 µm
Configurations (KC Assemblies)	T-Flow, In-line			
Configurations (Cartridge Filters)	ABF04	AB1	AB2	AB3
Nominal Filter Areas	0.48 m ² / 5.17 ft ²	1.2 m ² / 13 ft ²	2.4 m ² / 26 ft ²	3.6 m ² / 39 ft ²
Nominal Length	102 mm / 4 in	254 mm / 10 in	508 mm / 20 in	762 mm / 30 in
Maximum Operating Temperature	170 °C / 338 °F			
Maximum Forward Differential Pressure	0.59 MPa < 50 °C / 85 psid < 120 °F			
Maximum Operating Pressure	0.49 MPaG (< 25 °C / 77 °F)			
	0.39 MPaG (< 60 °C / 140 °F)			
	0.34 MPaG (< 90 °C / 194 °F)			
	0.20 MPaG (< 120 °C / 248 °F)			
	0.15 MPaG (< 150 °C / 302 °F)			
	0.12 MPaG (< 170 °C / 338 °F)			

UltiKleen™ Filters

Typical Flow Characteristics - 1cP fluid, 20 °C

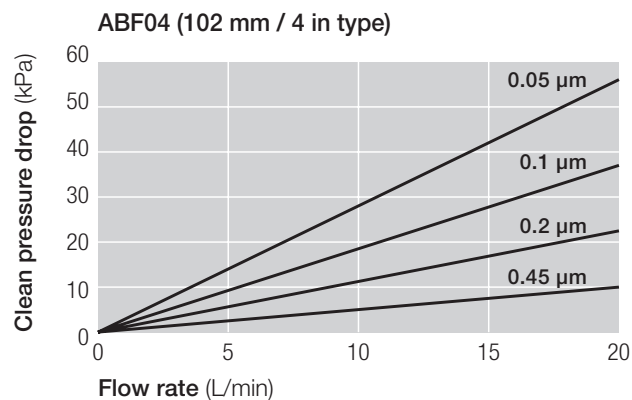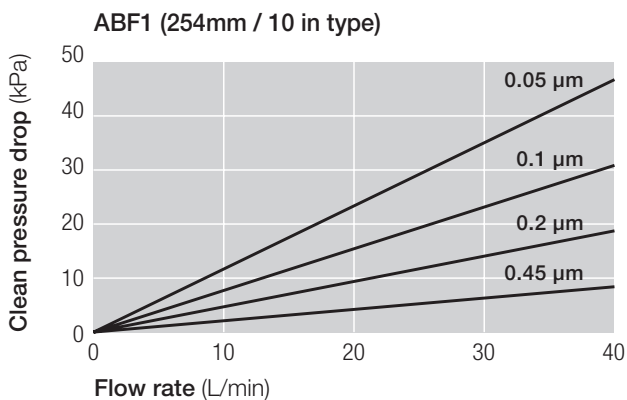

Dimensions

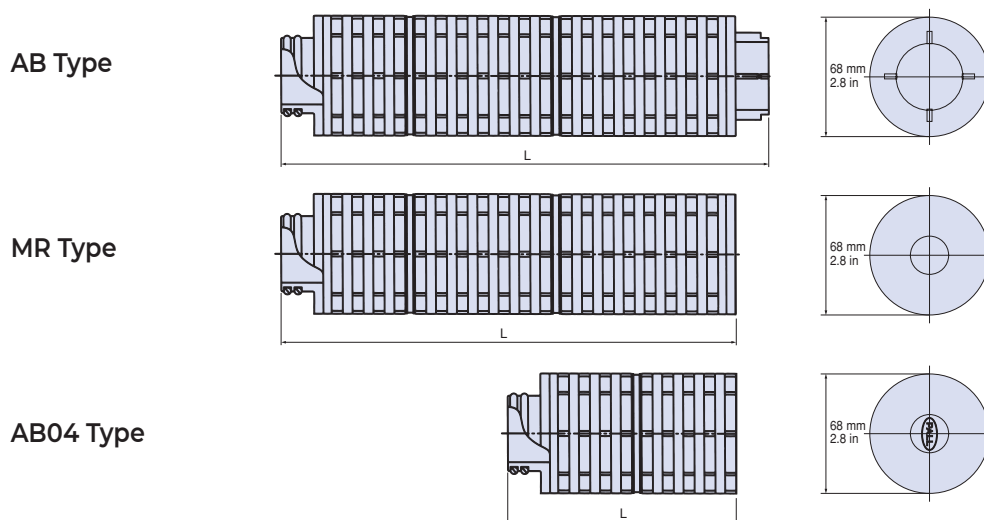

Part Numbers / Ordering Information²

ABF 1 UCF 2 3EH1 3

MRF 1 UCF 2 25EH1 3

Table 1

Code	Cartridge Length		
	Nominal	AB type	MR type
04	4 in	130 mm / 5.1 in	-
1	10 in	284 mm / 11.2 in	262 mm / 10.3 in
2	20 in	544 mm / 21.4 in	503 mm / 19.8 in
3	30 in	794 mm / 31.3 in	-

Table 2

Code	Removal Ratings
D	0.05 µm
T	0.1 µm
R	0.2 µm
X	0.45 µm

Table 3





Code	Prewet Option
blank	Without Prewet
-K3	Prewet filter (packaged in DI water)
-K7	Prewet filter (packaged in DI water), Low metal extractables ³

² Part numbers in combination with all codes are not always available. Please contact Pall for the part number availability.

³ Please contact Pall on the extractable conditions.


UltiKleen™ KC Assemblies

Typical Flow Characteristics - 1cP fluid, 20 °C

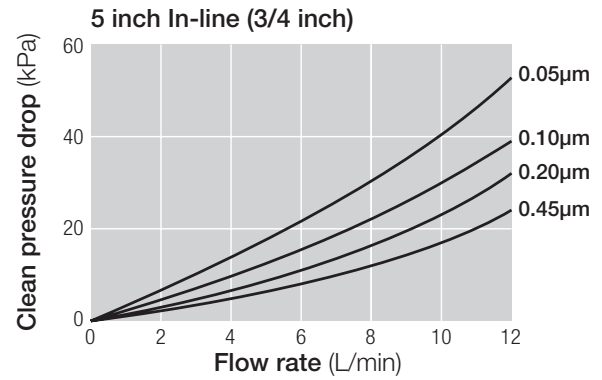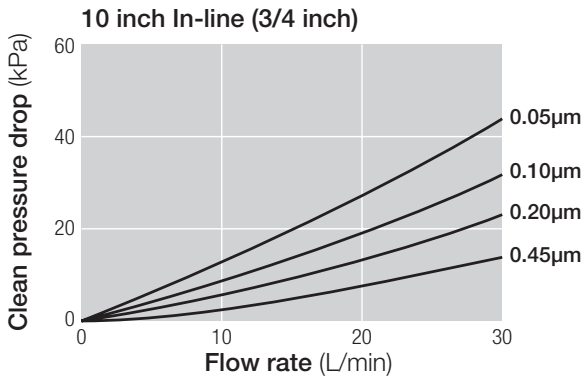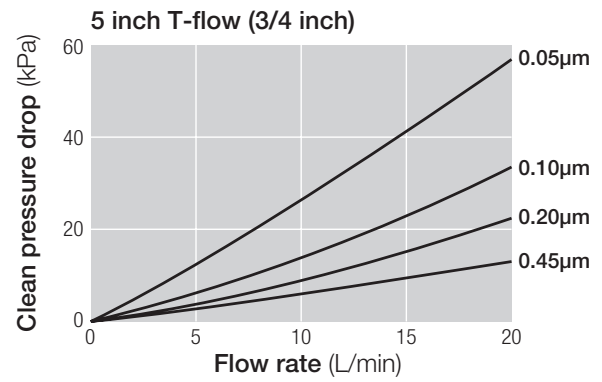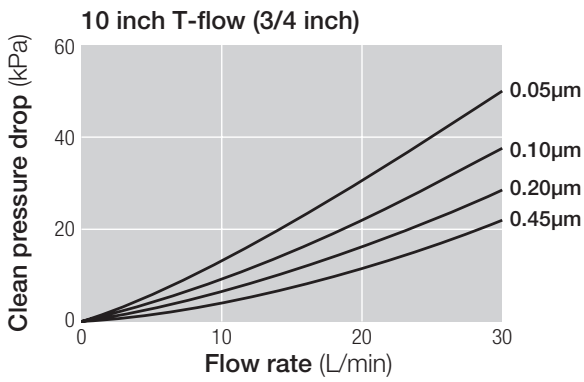


Dimensions by Configurations


10 inch T-flow

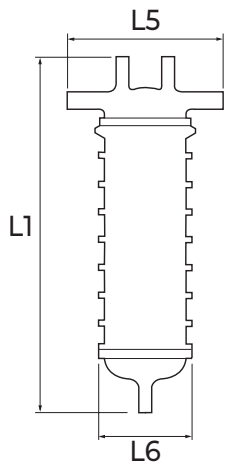


5 inch T-flow

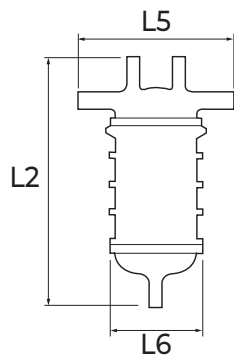

10 inch In-line

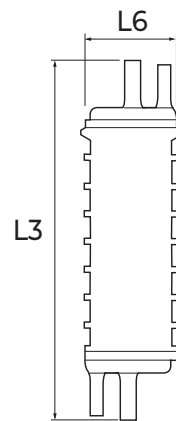

5 inch In-line



Nominal Length (mm)

Length	Tube size 3/4 in (Code 13)	Tube size 1/2 in (Code 09)
L1	416	-
L2	281	-
L3	430	420
L4	292	282
L5	180	-
L6	105	106

UltiKleen™ KC Assemblies

Part Numbers / Ordering Information⁴

LDF 1 2 UCF 3 4 E 5 6

Table 1

Code	Flow
T	T-flow
N	In-line

Table 2

Code	Cartridge Size
1	10 in
05	5 in

Table 3

Code	Removal Ratings
D	0.05 µm
T	0.1 µm
R	0.2 µm
X	0.45 µm

Table 4

Code	Tube Size
09 ⁵	1/2 in female
13	3/4 in female

Table 4

Code	Connection Size
06 ⁶	3/8 in male
08 ⁶	1/2 in male
12 ⁷	3/4 in male
64 ⁸	3/8 in male

Table 5

Code	Connections
1	20 series (Flowell)
2	Super Pillar Type (Nippon Pillar)
51	Flare style
6 ⁹	FinalLock
71	Super Pillar 300 P series (Nippon Pillar)
72	Super Pillar 300 P series L type (Nippon Pillar)
8	60 series (Flowell)

Table 6

Code	Prewet Option
blank	Without Prewet
-K3	Prewet filter (packaged in DI water)
-K7	Prewet filter (packaged in DI water) Low metal extractables ¹⁰

⁴ Disposable capsules are not available with every option. Please contact Pall for the part number availability.

⁵ Only for In-line type.

⁶ Only for flare style of In-line type.

⁷ Only for flare style.

⁸ Only for Super Pillar 300 series.

⁹ Only for T-flow type.

¹⁰ Contact your local Pall representative for information about extractables.



Microelectronics

25 Harbor Park Drive
Port Washington, NY 11050
+1 516 484 3600 telephone
+1 800 360 7255 toll free US

Nihon Pall Ltd.

6-5-1, Nishishinjuku,
Shinjuku-ku
Tokyo 163-1325 Japan
+81 3 6901 5700 telephone
+81 3 5322 2109 fax

Visit us on the Web at www.pall.com/microelectronics
Contact us at www.pall.com/contact

Pall Corporation has offices and plants throughout the world. To locate the Pall office or distributor nearest you, visit www.pall.com/contact.

The information provided in this literature was reviewed for accuracy at the time of publication. Product data may be subject to change without notice. For current information consult your local Pall distributor or contact Pall directly.

IF APPLICABLE Please contact Pall Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

© Copyright 2023, Pall Corporation. Pall,  and UltiKleen are trademarks of Pall Corporation.
® Indicates a trademark registered in the USA.