

Description

The UltiKleen PK filter is an all fluoropolymer cartridge, utilizing Laid-Over-Pleat pleated filter medium designed for 3 nm filtration of bulk aggressive process gases.

Features and Benefits

- Highest flow rates of all fluoropolymer cartridges with excellent compatibility
- High purity PFA fluoropolymer hardware
- 3 nm filtration of oxygen and aggressive process gases
- Optimized Laid-Over-Pleat Ultipleat® filter design
- High flow rates vs. differential pressure
- Low differential pressure
- Manufactured in a cleanroom environment
- 100% integrity tested
- Fits all Ultipleat® PK filter housings




Specifications

Materials of Construction

Components	Materials
Filter Medium	PTFE
Media Support	PTFE
Core	PFA
End Caps	PFA
O-ring	FEP encapsulated fluoroelastomer

Removal Ratings	≥ 3 nm (Gas)
Maximum Operating Temperature	120 °C / 248 °F
Maximum forward differential pressure	0.145 MPa @ 120 °C / 21 psid @ 248 °F 0.39 MPa @ 25 °C / 57 psid @ 77 °F
Housings	Ultipleat PK stainless steel filter Housings. (For availability of specific options and housing details, please contact your Pall Corporation representative.)


Pressure Drop vs. Air Flow Rate (20 °C / 68 °F)

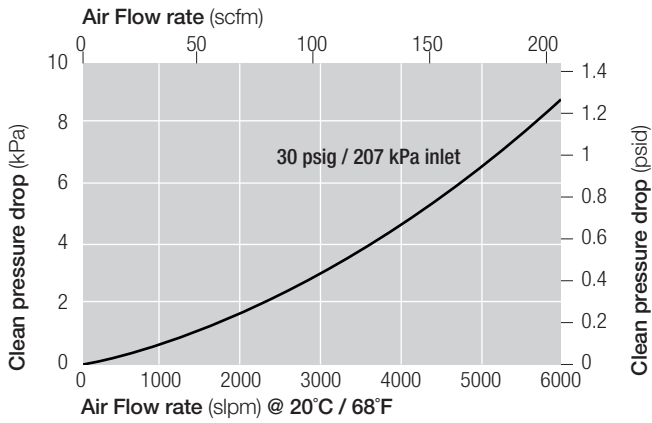

Part Numbers / Ordering Information

UPKF510F002H1

Dimensions (nominal)

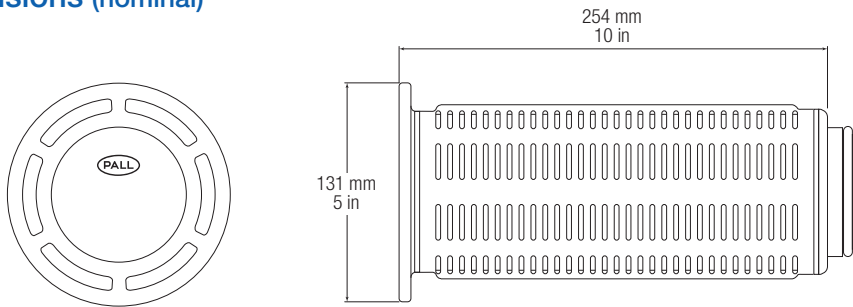

Specifications and availability: The information provided in this literature was reviewed for accuracy at the time of publication. Product availability may be subject to change without notice. For current information, consult your local Pall distributor or contact Pall Corporation directly.



Pall Corporation

Microelectronics

25 Harbor Park Drive
Port Washington, NY 11050
+1 800 360 7255 toll free US
+1 516 484 3600 telephone
+1 516 801 9711 fax

Nihon Pall Ltd.

6-5-1, Nishishinjuku,
Shinjuku-ku
Tokyo 163-1325 Japan
+81 3 6901 5700 telephone
+81 3 5322 2109 fax

Visit us on the Web at microelectronics.pall.com

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to www.pall.com/corporate_contact.asp.

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit www.pall.com to verify that this information remains valid. Products in this document may be covered by one or more of the following patent numbers: US5543047; US5690765; US6113784; US7083564; US7318800; EP0982061; EP0667800; EP1380331.

© Copyright 2019, Pall Corporation. Pall, , Ultipleat and UltiKleen are trademarks of Pall Corporation. ® indicates a trademark registered in the USA. **Filtration. Separation. Solution.** is a service mark of Pall Corporation.