



IOL Series Filter Housings

- Single Cartridge Housing Accepts AB Style, Single Open End Filter Elements
- All Stainless Steel Materials of Construction
- Accepts 1 in (2.54 cm), 5 in (12.7 cm), 10 in (25.4 cm), 20 in (50.8 cm) or 30 in (76.2 cm) Code 3, Code 7, Code 8 or Code 18 Filter Cartridges
- In-Line Inlet and Outlet Connections for Easy Installation
- Quick Opening T-Handle V-Band Clamp Facilitates Filter Change-out
- Wide Choice of Inlet/Outlet Sizes and O-ring Seal Options
- Passivated for Purity

Housing Specifications

Design Ratings¹:

260 psig (17.9 bar) @ 100°F (40°C)

200 psig (13.8 bar) @ 300°F (150°C)

NOTE: Above ratings apply to housing only. Cartridge and housing O-ring selection may impose different and narrower limitations.

Materials of Construction:

Head: 316L Stainless Steel

Bowl: 316 Stainless Steel

Connections:

Inlet/Outlet: 3/4" NPT, 1" NPT, 3/4" BSPT, 1" BSPT

Flange Option: 150 lb. ANSI raised face flanges available for 1" IOL Housings

Vent/Drain: 1/4" NPT, BSPT or BSPP



Shell O-rings:

FEP Encapsulated Fluorocarbon Elastomer, Silicone Elastomer, Fluorocarbon Elastomer, Nitrile, Ethylene Propylene, Ethylene Propylene for Steam Service



Bracket Option: Stainless steel brackets are available as a standard option.

¹ - Fully vacuum rated.

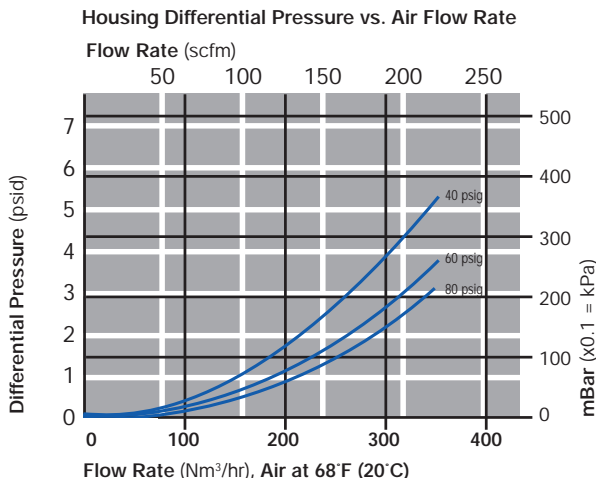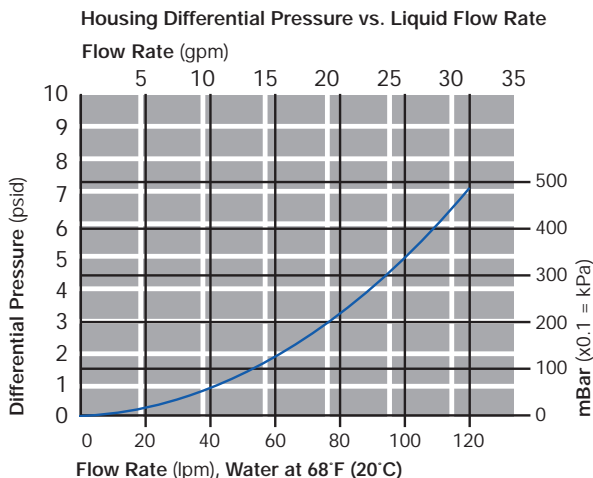


For liquids other than water, multiply differential pressure by specific gravity.

Dimensional Data

Model	Flow ² Rate (gpm/lpm)	Dimensions				Volume Gal/L	Weight Empty	
		A in/mm	B in/mm	C in/mm	D in/mm		Threaded Nozzle lbs/Kg	Flanged Nozzle lbs/Kg
IOL301	1/3.78	5.81/147.57	4.81/122	9.81/250	2/50.8	.04 / .15	4.5/2	
IOL305	5/19	7.8/198	4.81/122	9.81/250	4/102	0.11 / 0.4	5.1/2.32	11.9/5.4
IOL31	10/38	16.5/419	4.81/122	9.81/250	12.63/321	0.42/1.6	5.95/2.7	12.8/5.8
IOL32	20/76	26.25/667	4.81/122	9.81/250	22.5/572	0.82/3.1	6.92/3.14	13.7/6.2
IOL33	30/114	36.13/918	4.81/122	9.81/250	32.38/822	1.22/4.6	7.89/3.58	14.7/6.7
IOL701	1/3.78	5.81/147.57	4.81/122	9.81/250	2/50.8	.04 / .15	4.5/2	
IOL705	5/19	7.8/198	4.81/122	9.81/250	4/102	0.11/0.4	5.1/2.32	11.9/5.4
IOL71	10/38	16.5/419	4.81/122	9.81/250	12.63/321	0.42/1.6	5.95/2.7	12.8/5.8
IOL72	20/76	26.25/667	4.81/122	9.81/250	22.5/572	0.82/3.1	6.92/3.14	13.7/6.2
IOL73	30/114	36.13/918	4.81/122	9.81/250	32.38/822	1.22/4.6	7.89/3.58	14.7/6.7
IOL801	1/3.78	5.81/147.57	4.81/122	9.81/250	2/50.8	.04 / .15	4.5/2	
IOL805	5/19	7.8/198	4.81/122	9.81/250	4/102	0.11/0.4	5.1/2.32	11.9/5.4
IOL81	10/38	16.5/419	4.81/122	9.81/250	12.63/321	0.42/1.6	5.95/2.7	12.8/5.8
IOL82	20/76	26.25/667	4.81/122	9.81/250	22.5/572	0.82/3.1	6.92/3.14	13.7/6.2
IOL83	30/114	36.13/918	4.81/122	9.81/250	32.38/822	1.22/4.6	7.89/3.58	14.7/6.7
IOL1801	1/3.78	5.81/147.57	4.81/122	9.81/250	2/50.8	.04 / .15	4.5/2	
IOL1805	5/19	7.8/198	4.81/122	9.81/250	4/102	0.11/0.4	5.1/2.32	11.9/5.4
IOL181	10/38	16.5/419	4.81/122	9.81/250	12.63/321	0.42/1.6	5.95/2.7	12.8/5.8
IOL182	20/76	26.25/667	4.81/122	9.81/250	22.5/572	0.82/3.1	6.92/3.14	13.7/6.2
IOL183	30/114	36.13/918	4.81/122	9.81/250	32.38/822	1.22/4.6	7.89/3.58	14.7/6.7

² - Dependent on inlet/outlet selection.

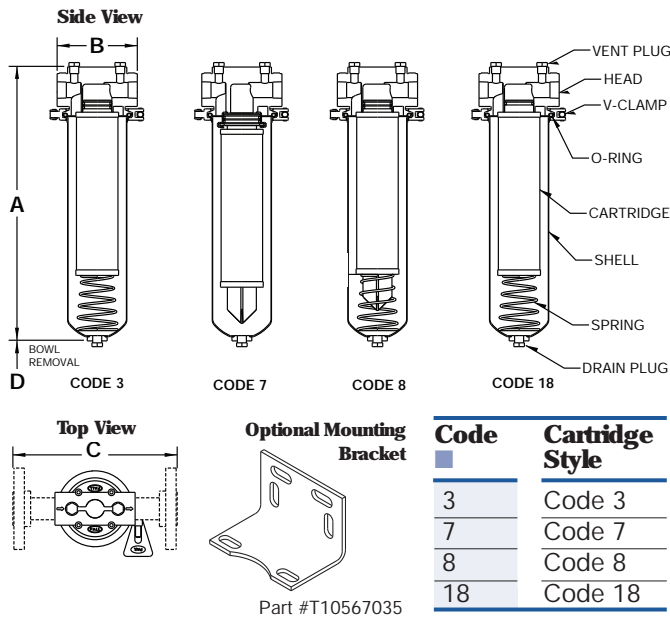

Part Numbers/Ordering Information

IOL ■ ● G ◆ (e.g., IOL 3 1 G N12 H13)

Code	Bowl Length		
01	1" (Available in Code 3 only, with N16 or B16 option)	1	10"
		2	20"
05	5"	3	30"

Code	Inlet/Outlet And Vent/Drain Size
N12	¾" NPT/¼" NPT
N16	1" NPT/¼" NPT
B12	¾" BSPT/¼" BSPT
B16	1" BSPT/¼" BSPT
B17	1" ANSI Flange/¼" BSPT
N17	1" ANSI Flange/¼" NPT
P17	1" ANSI Flange/¼" BSPP
P19	1" BSPP/¼" BSPP
B35	1" BS4504 Flange/¼" BSPT
P35	1" BS4504 Flange/¼" BSPP

Code	Seal Materials		
H	Fluorocarbon Elastomer	H4	Silicone
		H13	Nitrile
H1	FEP Encapsulated Fluorocarbon Elastomer	J	Ethylene Propylene
		J7	Ethylene Propylene for Steam Service



25 Harbor Park Drive
Port Washington, NY 11050
+1 516 484 3600 telephone
+1 888 873 7255 toll free US

Portsmouth - UK
+44 (0)23 9230 3303 telephone
+44 (0)23 9230 2507 fax
BioPharmUK@europe.pall.com e-mail
processuk@pall.com e-mail

Beijing - China
+86 10 87696388 telephone
+86 10 87691787 fax
pcnhsinfo@pall.com e-mail

Filtration. Separation. Solution.SM

Visit us on the Web at www.pall.com

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to www.pall.com/contact.

Please contact Pall Corporation for product applicability to specific National legislation and/or Regional Regulatory requirements for water and food contact use.

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit www.pall.com to verify that this information remains valid.

© Copyright 2009, Pall Corporation. Pall, and are trademarks of Pall Corporation. ® Indicates a Pall trademark registered in the USA. **Filtration. Separation. Solution.SM** is a service mark of Pall Corporation.