



CMPure CMPD Series Filter Cartridges



Description

The CMPure CMPD advanced melt blown depth cartridges are specifically optimized for CMP slurry systems resulting in highly consistent and repeatable filter performance. CMPD filters feature our proprietary CoLD fiber melt blowing technology, which integrates Co-Located Large Diameter fibers within the fine fiber matrix to produce a rigid structural network to the cartridge. As a result, CMPD filters provide outstanding structural strength, resistance to contaminant unloading and exceptionally long service life.

- All polypropylene construction
- Continuous gradient pore structure for built-in prefiltration
- Compatible with metal (W, Cu, Al), oxide and STI slurries
- Available also as disposable filter capsules

Specifications

Materials

- Medium: Polypropylene
- Core, cage and end caps: Polypropylene
- O-ring option: EPDM, Viton¹

Removal Ratings

- 0.5 μm , 1.5 μm , 2 μm , 5 μm , 10 μm , 15 μm , 20 μm , 30 μm and 50 μm

Configurations

- Nominal lengths: 102 mm / 4 in, 254 mm / 4 in, 508 mm / 20 in, 762 mm / 30 in, 1016 mm / 40 in
- Diameter: 66 mm / 2.6 in

Operating Conditions

- Maximum temperature: 82°C / 180°F
- Maximum differential pressure:
 - 0.4 MPa @ 30°C / 60 psid @ 86°F
 - 0.2 MPa @ 66°C / 30 psid @ 150°F
 - 0.1 MPa @ 82°C / 15 psid @ 180°F

Part Numbers / Ordering Information

CMPD ■ ◆ ▼ ● ▲

Code	Removal Rating (µm)
0.5	0.5
1.5	1.5
2	2
5	5
10	10
15	15
20	20
30	30
50	50

Code	Nominal Length (in / mm)
4	4 / 102
10	10 / 254
20	20 / 508
30	30 / 762
40	40 / 1016

Code	Material of Construction
U	Polypropylene

Code	Cartridge End Configuration
M3	SOE flat closed end, 222 O-rings
H21	Double open end, santoprene ¹ gasket seal

Code	O-ring Material
E	EPDM
F	Teflon ¹ Encapsulated Viton A
V	Viton A


Due to changing formulations and process improvements in CMP, please contact Pall Microelectronics for availability of latest filtration recommendations, including < 0.5 µm depth filters and different length cartridges.

These filter cartridges are also available in disposable capsules. See specifications for the Kleen-Change® In-Line Filter Capsules.

¹ Teflon and Viton are trademarks of E. I. du Pont de Nemours and Company.

Unit conversion: 1 bar = 100 kilopascals

Pressure Drop vs. Liquid Flow Rate²

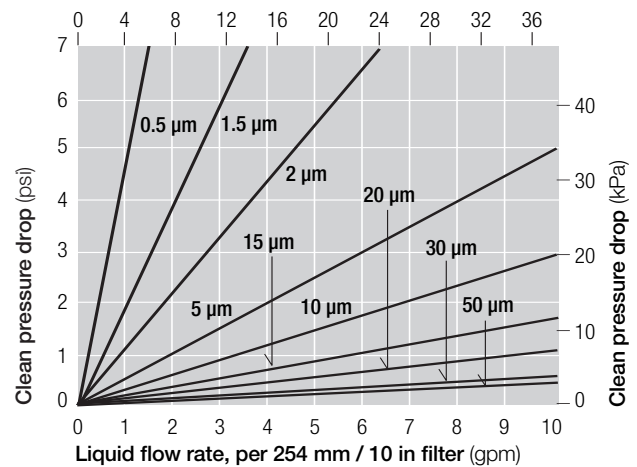

² For liquids with viscosities differing from water, multiply the pressure drop by the viscosity in centipoise.



25 Harbor Park Drive
Port Washington, New York 11050

1.800.360.7255 toll free (only in US)
1.516.484.3600 phone
1.516.625.3610 fax
microelectronics@pall.com

Filtration. Separation. Solution.SM

Visit us on the Web at www.pall.com/micro

Pall Corporation has offices and plants throughout the world.

© Copyright 2007, 2004, Pall Corporation. Pall and are trademarks of Pall Corporation. ® Indicates a Pall trademark registered in the USA. Filtration. Separation. Solution.SM is a service mark of Pall Corporation.