

## EPK Filters

### Description

Pall EPK filter cartridges are specifically designed for the wet cleaning applications in Thin Film Transistor Liquid Crystal Display (TFT LCD) manufacturing. The filters have excellent compatibility with the various process liquids. The unique cartridge construction, with its large filter area in a compact package, results in a small system footprint and reduced change-out costs. EPK cartridges are available in a wide range of removal ratings.

### Features

- AS568-334 O-ring seal
- 130 mm / 5 inch outer diameter (nominal)
- 272 mm / 10 inch length (nominal)
- High filter area, pleated cartridge
- Single open end filter
- Same configuration as Pall Ultipleat® PK filter
- Wide range of removal ratings

### Benefits

- High flow rates
- Longer filter service life
- Easy filter change-out
- Reduced filtration operating costs

### Specifications



#### Materials of Construction

Components	Materials
Filter Medium	Polypropylene (PP)
Support and drainage	Polypropylene
Core and cage	Polypropylene
End Cap	Polypropylene
O-ring	EPDM FEP encapsulated fluoroelastomer



Removal Ratings (µm)	PP : 0.2, 0.5, 1, 2, 4.5, 10, 20, 30
Maximum Operating Temperature	80 °C / 176 °F
Maximum Forward Differential Pressure	0.4 MPa @ 20 °C / 60 psid @ 68 °F 0.3 MPa @ 80 °C / 45 psid @ 176 °F
Housings	<ul style="list-style-type: none"> <li>• Ultipleat PK T-flow polypropylene housing P/N: UPKTUPP-1GU32J</li> <li>• Stainless steel and PVC housings.</li> </ul> <p>(For availability of specific options and housing details, please contact your Pall Corporation representative. )</p>

## Typical Flow Characteristics - 1cP fluid (20 °C)

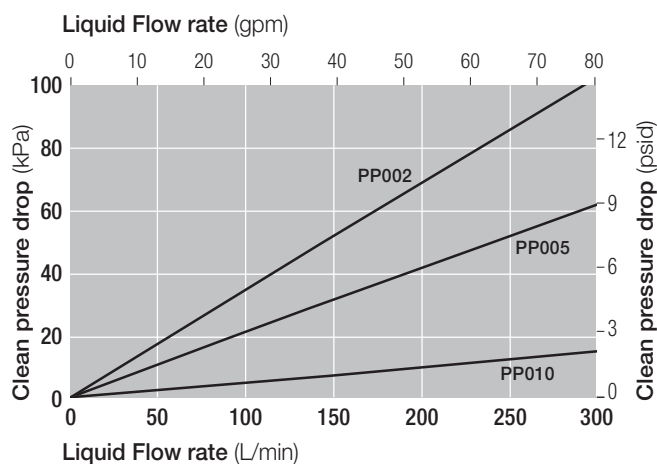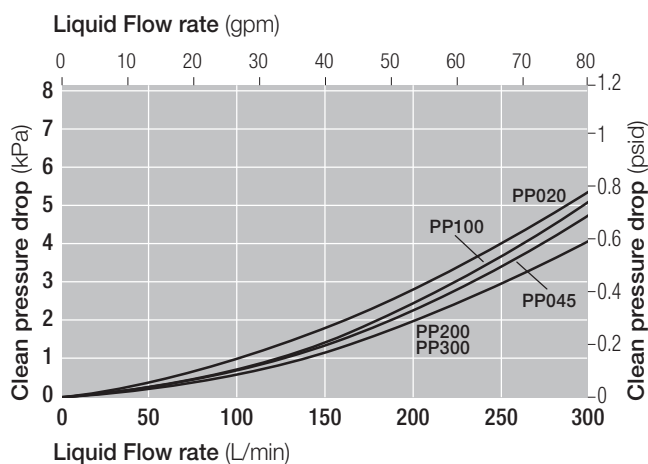

## Part Numbers / Ordering Information<sup>1</sup>

EPK510 1 2

Table 1

Code	Removal ratings
PP002	0.2 µm
PP005	0.5 µm
PP010	1 µm
PP020	2 µm
PP045	4.5 µm
PP100	10 µm
PP200	20 µm
PP300	30 µm

Table 2

Code	O-Ring
J	EPDM
H1	FEP encapsulated fluoroelastomer

<sup>1</sup> Not all part number combinations are always available. Please contact your Pall representative for availability.

The information provided in this literature was reviewed for accuracy at the time of publication. Product availability may be subject to change without notice. For current information, consult your local Pall representative.



Pall Corporation

### Microelectronics

25 Harbor Park Drive  
Port Washington, NY 11050  
+1 800 360 7255 toll free US  
+1 516 484 3600 telephone  
+1 516 801 9711 fax

### Nihon Pall Ltd

6-5-1, Nishishinjuku,  
Shinjuku-ku Tokyo  
163-1325 Japan  
+81 3 6901 5700 telephone  
+81 3 5322 2109 fax

### Visit us on the Web at [microelectronics.pall.com](http://microelectronics.pall.com)

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to [www.pall.com/en/support](http://www.pall.com/en/support)

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit [www.pall.com](http://www.pall.com) to verify that this information remains valid.

© Copyright 2020, Pall Corporation. Pall, is a trademark of Pall Corporation.  
® Indicates a Pall trademark registered in the USA. *Filtration. Separation. Solution.*<sup>SM</sup> is a service mark of Pall Corporation.