

## Description

The High-Flow Emflon filters are designed for bulk nitrogen and clean dry air applications in the LCD and semiconductor industries where flow rates exceed 2,000 Nm<sup>3</sup>/h / 1,000 SCFM.

- High particle retention
- Exceptionally high flow rates
- Low differential pressure
- 100% integrity tested
- Flow rates up to 6,500 Nm<sup>3</sup>/h / 3,826 SCFM

## Features & Benefits

- A single 1,016 mm / 40 in HFE filter can replace up to (30) standard 254 mm / 10 in long x 70 mm / 2.75 in diameter cartridges. This allows for the use of smaller housings which will lower capital investment and offers a smaller installation footprint
- Reduced time for filter replacements



## Specifications


### Materials of Construction

Components	Materials
Filter Medium	PTFE
Media Support	Polypropylene
Cage and End Caps	Polypropylene
Internal Core	316L Stainless steel
U-cup seal	EPR


Configurations	20 inch	40 inch
Nominal Filter Areas	4.6 m <sup>2</sup> / 50 ft <sup>2</sup>	9.2 m <sup>2</sup> / 100 ft <sup>2</sup>
Nominal Length	508 mm / 20 in	1,016 mm / 40 in
Diameter	171.5 mm / 6.75 in	
Removal Ratings	FG : ≥ 3 nm / FN : ≥ 0.1 μm	
Maximum Operating Temperature	60 °C / 140 °F	
Maximum Forward Differential Pressure	0.276 MPa @ 60 °C / 40 psid @ 140 °F	

## Pressure Drop vs. Gas Flow Rate ( 20 °C / 68 °F )

### FG grade

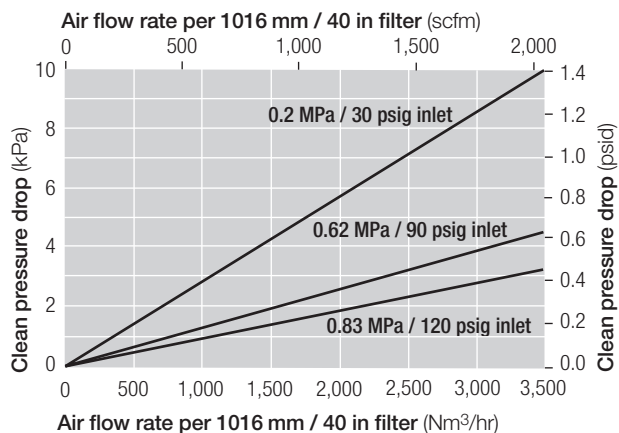

### FN grade

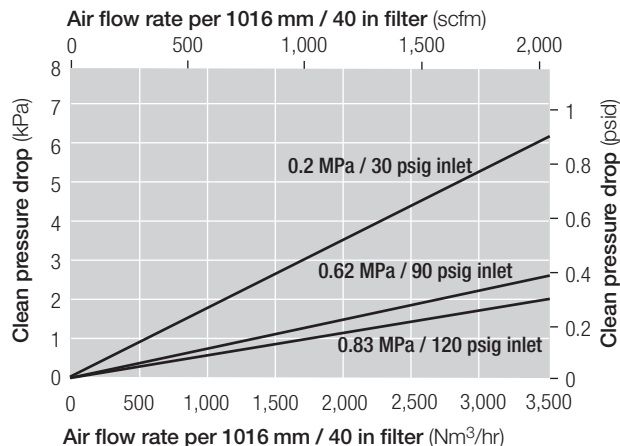

## Part Numbers / Ordering Information

HFE6 1 2 JU

Table 1

Code	Cartridge Length (Nominal)	Flow Rate
20	508 mm / 20 in	3,250 Nm <sup>3</sup> / h / 1,913 SCFM
40	1016 mm / 40 in	6,500 Nm <sup>3</sup> / h / 3,826 SCFM

Table 2

Code	Removal Ratings
FG	≥ 3 nm
FN	≥ 0.1 μm

## Representative example part numbers

HFE620FGJU

HFE640FGJU

HFE640FNJU

## Filter Housings

High-Flow Emflon stainless steel filter housings are available in a wide variety of connection sizes, connection types, surface finishes and code requirements to meet your specific needs. Please contact your local Pall representative to discuss the appropriate housing for your application.



Pall Corporation

### Microelectronics

25 Harbor Park Drive  
Port Washington, NY 11050  
+1 800 360 7255 toll free US  
+1 516 484 3600 telephone  
+1 516 801 9711 fax

### Nihon Pall Ltd.

6-5-1, Nishishinjuku,  
Shinjuku-ku  
Tokyo 163-1325 Japan  
+81 3 6901 5700 telephone  
+81 3 5322 2109 fax

### Visit us on the Web at [microelectronics.pall.com](http://microelectronics.pall.com)

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to [www.pall.com/corporate\\_contact.asp](http://www.pall.com/corporate_contact.asp).

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit [www.pall.com](http://www.pall.com) to verify that this information remains valid.

© Copyright 2019, Pall Corporation. Pall, , and Emflon are trademarks of Pall Corporation.  
® Indicates a trademark registered in the USA. Filtration. Separation. Solution.<sup>sm</sup> is a service mark of Pall Corporation.