

Encore[®] Series Filter Cartridges

Multi-Purpose Depth Filter Cartridges

- Precision wound depth filter cartridges provide cost effective filtration of fluids
- Premium cotton, standard cotton, premium polypropylene, natural cotton, and general purpose polypropylene filter media available
- Retention ratings from 1-200 μm
- Cartridge lengths from 9 ³/₄" (24.8 cm) to 50" (127 cm) permit rapid installation into most filter housings
- · Core cover and extended core options available

Performance Specifications

Filter Grades:

1, 3, 5, 10, 20, 25, 30, 40, 50, 75, 100, 200 µm

Product Specifications


Materials of Construction:

Filter Media:	Bleached FDA-listed cotton, standard cotton, natural cotton, FDA-listed polypropylene, standard polypropylene
Center Core:	Polypropylene, Electrolytic Tin Plated steel (ETP), 304 and 316 stainless steel
Core Cover:	Cover is used to control fiber migration. Material is compatible with and equal to the resistance of the filter media.
Extended Core:	Provides additional fiber migration control and is available in polypropylene, electrolytic tin plated steel, 304 and 316 stainless steel.

Dimensions (nominal):

Lengths:

9 ¼" (24.8 cm), 10" (25.4 cm), 19 ½" (49.5 cm), 20" (50.8 cm), 29 ½" (74.9 cm), 30" (76.2 cm), 39" (99.1 cm), 39 ½" (100.3 cm), 40" (102 cm), 50" (127 cm)

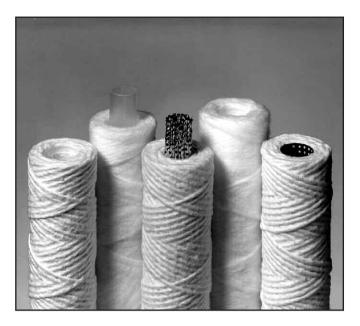

Material Selection Guide

Filter Medium	Premium Cotton ¹	Standard Cotton	Natural Cotton	Premium Polypropylene ¹	Standard Polypropylene
Maximum Temperature					
Electrolytic Tin Plated Steel Core	300°F (149°C)	300°F (149°C)	300°F (149°C)	275°F (135°C)	275°F (135°C)
Stainless Steel Core	300°F (149°C)	300°F (149°C)	300°F (149°C)	275°F (135°C)	275°F (135°C)
Polypropylene Core	140°F (60°C)	140°F (60°C)	140°F (60°C)	140°F (60°C)	140°F (60°C)
Compatibility with:					
Food	Excellent	NR	NR	Excellent	NR
Beverages	Excellent	NR	NR	Excellent	NR
Potable Water	Excellent	NR	NR	Excellent	NR
Organic Solvents	Excellent	Excellent	Excellent	Good	Good
Oils	Excellent	Excellent	Excellent	Fair	Excellent
Organic Acids	Good	Good	Good	Excellent	Excellent
Alkalies	Good	Good	Good	Excellent	Excellent
Oxidizing Agents	Fair	Fair	Fair	Good	Good
Steam	NR	NR	NR	Fair	NR
Strong Inorganic Acids	NR	NR	NR	Excellent	Excellent
Dilute Inorganic Acids	Fair	Fair	Fair	Excellent	Excellent
Microorganism Resistance	Poor	Poor	Poor	Excellent	Excellent

¹ - FDA-listed materials. NR = Not Recommended

Part Numbers/Ordering Information

Code	Filter Grades	Code	Filter Medium
1	1 µm	С	Bleached
3	3 µm		FDA-listed Cotton
5	5 µm	NC	Natural Cotton
10	10 µm	P	Standard
20	20 µm		Polypropylene
25	25 µm	— SC	Standard Cotton
30	30 µm	U	FDA-listed
40	40 µm		Polypropylene
50	50 µm		
75	75 µm		
100	100 µm		
200	200 µm		

Code	Cartridge Lengths	Code	Core Cover Option
	(nominal)	Blank	No Core Cover
9.75	9 3/4"	С	Core Cover
10	10"		
19.5	19 ¹ /2"	Code	Extended Core
20	20"		
29.5	29 ¹ /2"	Blank	None
30	30"	EA	304 Stainless Steel
39	39"	ES	316 Stainless Steel
39.5	39 ¹ /2"	ET	Electrolytic Tin Plated Steel
40	40"	EU	Polypropylene
50	50"	20	roijpiopylene
Code	Core Materials	Code	Packaging

Code	Core Materials
А	304 Stainless Steel
S	316 Stainless Steel
Т	Electrolytic Tin Plated Steel
U	Polypropylene

Code *	Packaging
Blank	Standard Packaging
1PK	Fin Sealed

Visit us on the Web at www.pall.com

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to www.pall.com/contact.asp.

Please contact Pall Corporation for product applicability to specific National legislation and/or Regional Regulatory requirements for water and food contact use.

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit www.pall.com to verify that this information remains valid.

Copyright 2009, Pall Corporation. Pall, PALD and Encore are trademarks of Pall Corporation.
Indicates a trademark registered in the USA. *Filtration. Separation. Solution.sw* is a service mark of Pall Corporation.

PAL	D	Pal
	®	

Pall Corporation

25 Harbor Park Drive Port Washington, NY 11050 +1 516 484 3600 telephone +1 800 289 7255 toll free US