

XpressKleen™ G2 filters

XpressKleen™ G2 KC Assemblies

(5 nm)



Data Sheet MEXP5END

Description

The XpressKleen G2 XP 5 nm filter represents a significant advance in the development of microporous PTFE membranes to meet the severe contamination control challenges that exist below the 14 nm manufacturing node. Pall Corporation's material science team of scientists and engineers has created a new filter morphology unlike current designs using newly developed proprietary PTFE membrane manufacturing technology.

The revolutionary design provides unparalleled control of critical size particles greater than 5 nm combined with a new standard of device cleanliness and purity that guarantees less than 500 ppt of total metal ion extractables per single length filter¹. Proprietary advanced cleaning methods produce a filter with ultra-low levels of organics, NVR, and transient surface borne particles.

Every aspect of the XpressKleen XP 5 nm filter, from the PTFE resin to the final package, is designed, controlled, and manufactured to deliver unparalleled and elevated performance that is consistent, repeatable, and a new standard in sub 7 nm particle retention.

The unique combination of low differential pressure and measured retention at 5 nm makes the filter suitable for use from the point of supply (POS) to the point of process (POP), in bulk delivery, recirculating batch filtration, and in single wafer applications. The XpressKleen 5 nm filter is an integral part of a contamination control system that enables particle and purity defect levels needed for 10 nm and finer manufacturing.

The nondewetting XpressKleen G2 filter is qualified for use in aggressive high temperature cleaning chemistries like SPM, H₃PO₄; concentrated chemicals like NH₄OH, HCl, H₂SO₄, H₂O₂; IPA and other solvents; high ppm DIO₃, and aqueous chemistries such as SC1 and SC2.

- Low extractables < 500 ppt total of 19 elements
< 0.1 ppb (Ni), < 0.2 ppb (Cu)
- > 20nm particle rinse up control in UPW
- TOC control
- 100% prewetted shipment with ultrapure water package
- High flow rates
- G2 KC assembly available with downstream venting
- Disposable filter unit with filter cartridge integrally sealed in housing
- Sealed assembly for safer handling and faster changeout
- 100% integrity tested

¹ Total metal concentrations of 19 elements for KC Assemblies: Al, Ba, B, K, Na, Fe, Li, Mg, Mn, Pb, Sn, Ti, Zn, Ni, Cu, Cr, Co, Ca, Ag. Consult factory for details.



KleenChange (KC)
(downstream venting)



G2 Cartridge

Specifications

Materials of Construction²

Parts	Material
Filter Medium	Surface-modified PTFE
Media Support	PFA
Core, Cage and End Caps	PFA
Housing	PFA
O-ring Options ³	FEP-encapsulated fluoroelastomer, FFKM

² All perfluoropolymer materials made without PFOA.

³ Consult factory for other options.

Removal Ratings and Operating Conditions

Kleen-Change® (KC)

Removal Ratings	5 nm
Media Code	XP5
Filter Area	2.8 m ²
Flow	Inline, L-flow, T-flow
Metallic extractables ⁴	< 500 ppt ⁴
Maximum Operating Temperature	185 °C / 365 °F

Maximum Operating Temperature

0.49 MPaG (71 psig) @ 25 °C (77°F)
0.39 MPaG (56.6 psig) @ 60 °C (140°F)
0.34 MPaG (49.3 psig) @ 90 °C (194°F)
0.20 MPaG (29.0 psig) @ 120 °C (248°F)
0.15 MPaG (21.8 psig) @ 150 °C (302°F)
0.12 MPaG (17.4 psig) @ 185 °C (365°F)


Cartridge

Removal Ratings	5 nm
Media Code	XP5
Filter Area (ABFG1)	2.8 m ²
Metallic extractables ⁴	< 1 ppb ⁴
Maximum Operating Temperature	185 °C / 365 °F
Maximum differential pressure	0.59 MPaG (85.6 psig) @ 50 °C (120 °F)


⁴ 19 elements, consult factory for test conditions

Typical Flow Characteristics - 1 cP fluid, 20 °C


G2 cartridge

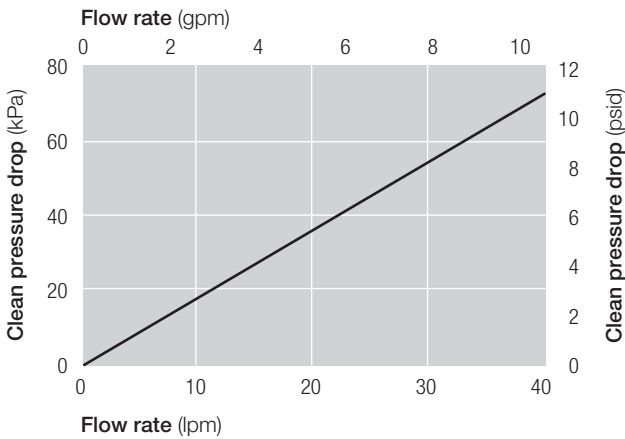


1" KC (In-line, T-flow)

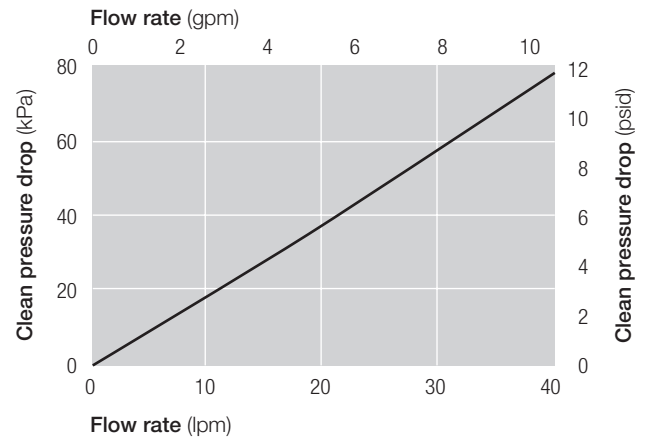

3/4" KC (L-flow, T-flow)

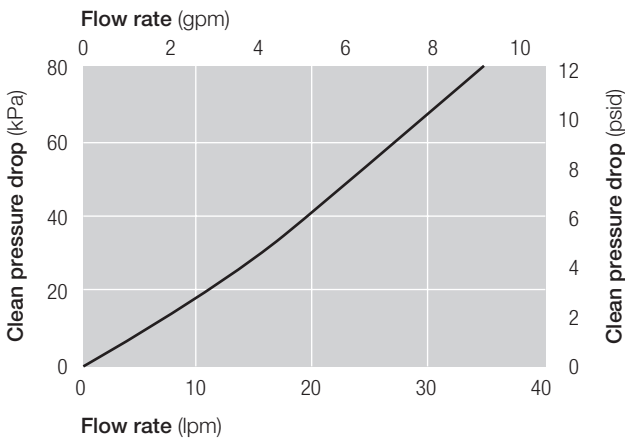

3/4" KC (In-line)

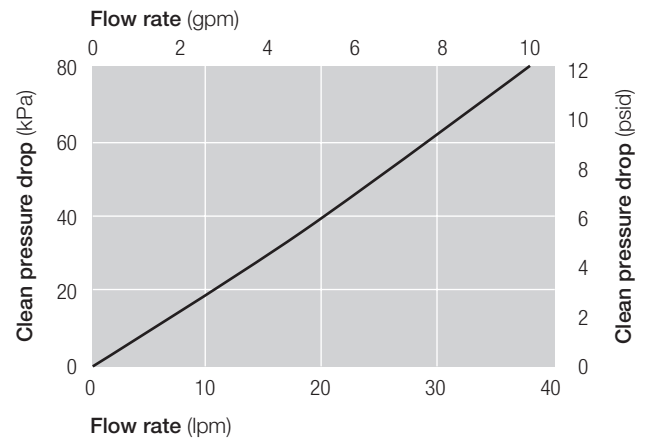

XpressKleen G2 KC Assemblies

LDF 1 2 1XP 3 4 E 5

Table 1

Code	Downstream vent
G	N / A
V	Available

Table 2

Code	Flow
T	T-flow
N	In-line
L	L-flow

Table 3

Code	Removal rating
5	5 nm

Table 4

Code	Inlet/Outlet	Vent/Drain		Type
		Head end	Bowl end	
12	3/4 in male	1/2 in male	1/2 in male	T-flow/L-flow
12	3/4 in male	1/2 in male	1/2 in female	DV type
12	3/4 in male	3/8 in male	3/8 in male	In-line
124	3/4 in male	1/4 in male	1/4 in male	In-line
128	3/4 in male	1/2 in male	1/2 in male	DV type
13	3/4 in female	1/2 in female	1/2 in female	T-flow
16	1 in male	1/2 in male	1/2 in male	T-flow
16	1 in male	1/2 in male	1/2 in female	DV type
16	1 in male	3/8 in male	3/8 in male	In-line
164	1 in male	1/4 in male	1/4 in male	In-line
168	1 in male	1/2 in male	1/2 in male	DV type
17	1 in female	1/2 in female	1/2 in female	In-line

Table 5⁵

Code	Connections
1	20 series Flowell ⁶
2	Super Pillar type ⁷
51	Flare style
6	FinalLock ⁸
71	Super Pillar 300 P series
72	Super Pillar 300 P series L type
8	60 series Flowell
9	11CR series Flowell

⁵ Disposable capsules are not available with every option. (Refer to codes for options.) Contact your local Pall representative for option availability.

⁶ Flowell is a trademark of Flowell Corporation.

⁷ Super Pillar is a trademark of Nippon Pillar Packing Co., Ltd.

⁸ FinalLock is a trademark of Kurabo Industries Ltd.

XpressKleen G2 Filter⁹

ABFG 1 XP 2 3E 3

Table 1

Code	Length (Nominal)	
	Inch	mm
1	10	225
2	20	468

Table 2

Code	Removal rating
5	5 nm

Table 3

Code	O-ring material
H1	FEP-encapsulated fluoroelastomer
H35	Perfrez ¹⁰
H38	FFKM

⁹ Cartridges are shipped prewet as standard.

¹⁰ Perfrez is a trademark of Applied Seals North America, Inc.



Microelectronics

25 Harbor Park Drive
Port Washington, NY 11050
+1 516 484 3600 telephone
+1 800 360 7255 toll free US

Nihon Pall Ltd.

6-5-1, Nishishinjuku,
Shinjuku-ku
Tokyo 163-1325 Japan
+81 3 6901 5700 telephone
+81 3 5322 2109 fax

Visit us on the Web at www.pall.com/microelectronics
Contact us at www.pall.com/contact

Pall Corporation has offices and plants throughout the world. To locate the Pall office or distributor nearest you, visit www.pall.com/contact.

The information provided in this literature was reviewed for accuracy at the time of publication. Product data may be subject to change without notice. For current information consult your local Pall distributor or contact Pall directly.

IF APPLICABLE Please contact Pall Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

© Copyright 2024, Pall Corporation. Pall, , Kleen-Change, and XpressKleen are trademarks of Pall Corporation. ® Indicates a trademark registered in the USA.