

Ultramet-L® 4581 Series Assembly (1.5 nm)



Data Sheet MEUL4581EN

Description

The Ultramet-L® 4581 Series Filter Assemblies are available with an all 316L stainless steel housing and 316L stainless steel filter. They are designed for ≥ 1.5 nanometer ($0.0015 \mu\text{m}$) filtration of semiconductor grade gases. The 4581 series filters are recommended for all applications with process gases that are compatible with 316L stainless steel.

Features & Benefits

- State-of-the-art 316L stainless steel media
- Excellent particle removal efficiency vs. pressure drop
- Accommodates extremely high flow rates for the assembly size
- Excellent gas displacement and desorption characteristics
- High temperature and pressure capabilities
- Compact size for ease of installation
- Wide variety of fitting options available
- 100% helium leak tested
- Cleanroom manufactured and packaged
- Housing material meets or exceeds VIM VAR specifications



Specifications


Filter Medium	316L stainless steel
Internal Surface Finish	$10 \mu\text{in} / 0.25 \mu\text{m R}_a$
Housing	Electropolished 316L stainless steel Housing material meets or exceeds typical VIM VAR specifications
Removal Rating	$\geq 1.5 \text{ nm}$
Particle Removal Characteristics¹	10^9 particle reduction up to 50 slpm / 1.76 scfm
Connections	$\frac{1}{4}$ " Gasket Seal, male (VCR ² or compatible)

Leak Rating	100% helium leak tested to $10^{-9} \text{ atm}\cdot\text{cm}^3/\text{sec}$ Design validated to $10^{-11} \text{ atm}\cdot\text{cm}^3/\text{sec}$
Maximum Operating Pressure	3,000 psig @ 100 °F / 207 bar @ 38 °C; 1,685 psig @ 840 °F / 116 bar @ 450 °C
Maximum Allowable Differential Pressure	125 psid @ 100 °F / 8.6 bar @ 38 °C; 60 psid @ 840 °F / 4.1 bar @ 450 °C
EU pressure Equipment Directive	Assemblies have been evaluated and are CE marked per the European Union's Pressure Equipment Directive 2014/68/EU


¹ Referenced at most penetrating particle size

² VCR is a trademark of Swagelok Co.

Pressure Drop vs. Gas Flow Rate

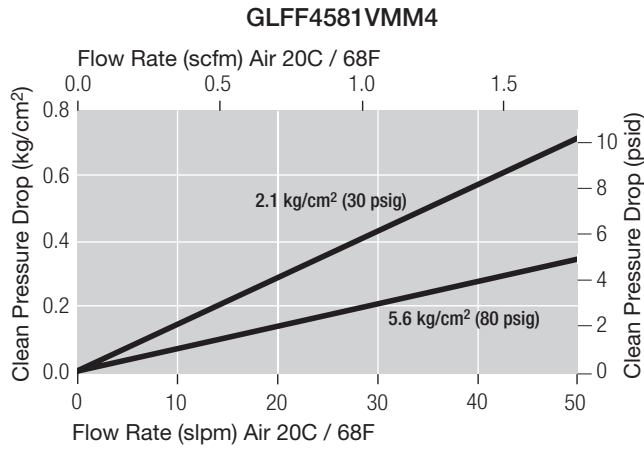

Dimensions

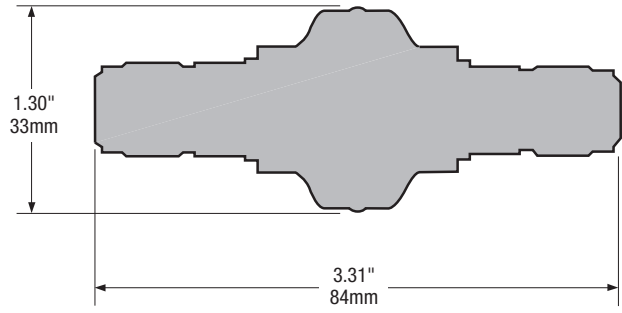

Part Numbers / Ordering Information

Part Number	Description	Fitting Type
GLFF4581VMM4	All Stainless Steel	1/4" Gasket Seal (VCR or Compatible) Male / Male

Unit conversion: 1 kilogram per square centimeter = 98.067 kilopascals



Microelectronics

25 Harbor Park Drive
 Port Washington, NY 11050
 +1 516 484 3600 telephone
 +1 800 360 7255 toll free US

Nihon Pall Ltd.

6-5-1, Nishishinjuku,
 Shinjuku-ku
 Tokyo 163-1325 Japan
 +81 3 6901 5700 telephone
 +81 3 5322 2109 fax

Visit us on the Web at www.pall.com/microelectronics
 Contact us at www.pall.com/contact

Pall Corporation has offices and plants throughout the world. To locate the Pall office or distributor nearest you, visit www.pall.com/contact.

The information provided in this literature was reviewed for accuracy at the time of publication. Product data may be subject to change without notice. For current information consult your local Pall distributor or contact Pall directly.

IF APPLICABLE Please contact Pall Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

© Copyright 2024, Pall Corporation. PALL, , are trademarks of Pall Corporation.
 ® Indicates a trademark registered in the USA.