



Ultipleat® P-Nylon Filter



Description

The Ultipleat P-Nylon filter is recommended specifically for bulk filtration of photoresists, solvents, TMAH-based developers and other chemicals, that are compatible with nylon 6,6 and High Density Polyethylene (HDPE). The filter design incorporates the latest advance in Pall filtration technology: the crescent shaped Ultipleat® filter configuration.

- Naturally hydrophilic
- Quick venting
- Wide range of configurations
- High flow rates
- Integrity testable
- Low extractables
- Manufactured in a cleanroom environment
- 100% integrity tested

Specifications

Materials

- Medium: Hydrophilic nylon 6,6
- Core, cage, and end caps: High Density Polyethylene (HDPE)
- Support and drainage: High Density Polyethylene (HDPE)
- O-ring options: Viton¹ and Teflon¹ encapsulated Viton

Removal Ratings

- 0.1 µm, 40 nm, 20 nm

Filter Areas

- 0.1 µm UNI: 0.93 m² / 10 ft² per 10 in
- 40 nm UND: 1.2 m² / 13 ft² per 10 in
- 20 nm UNM: 1.4 m² / 15 ft² per 10 in

Configurations

- Nominal length: 254 mm / 10 in, 508 mm / 20 in, 762 mm / 30 in, and 1016 mm / 40 in
- Diameter: 70 mm / 2.75 in
- O-ring size / end caps:
 - Code 3: 222 double O-ring / flat end
 - Code 8: 222 double O-ring / finned end
 - Code 7: 226 double O-ring bayonet lock / finned end
 - MR Code 3: 222 double O-ring / flat end designed to retrofit Code 0 elements

Operating Conditions



- Maximum operating temperature: 50°C / 120°F
- Maximum forward / reverse differential pressure: 275 kPa @ 20°C / 40 psid @ 68°F

Recommended Applications

- Anti-reflective coatings
- Up to 3% TMAH-based developers
- i-line, 248 nm, and 193 nm photoresists
- Solvents

¹ Viton and Teflon are registered trademarks of E. I. du Pont de Nemours and Company

Pressure Drop vs. Liquid Flow Rate²

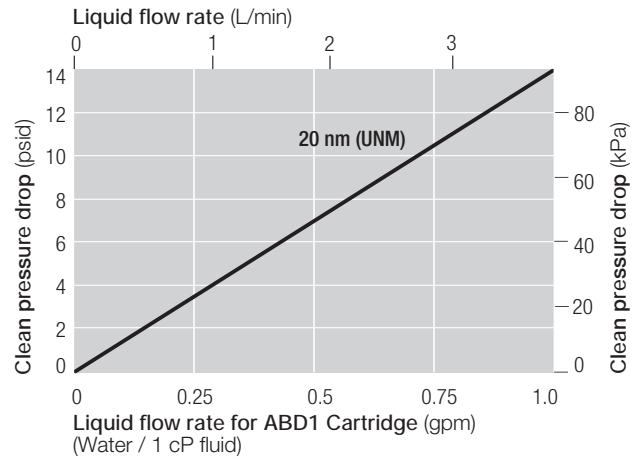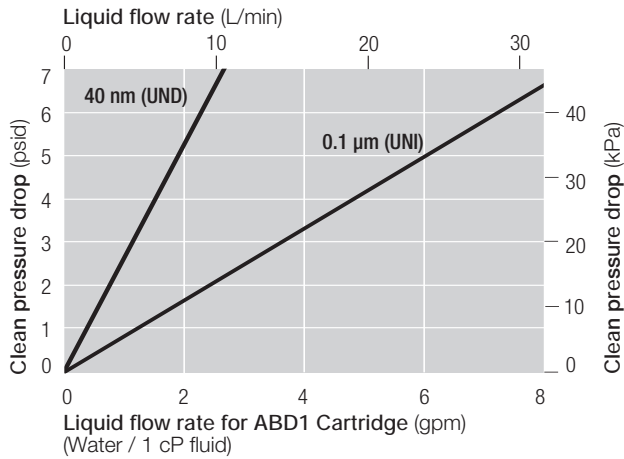

² For liquids with a viscosity differing from water, multiply the pressure drop by the viscosity in centipoise.

Part Numbers / Ordering Information

Part Number ³	Removal Rating	Nominal Length (mm / in)	Configuration Code	O-Ring Material ⁴
ABD1UNI3EH1	0.1 μm	254 / 10	3	Teflon encapsulated Viton
ABD1UNI8EH1	0.1 μm	254 / 10	8	Teflon encapsulated Viton
MRD1UNI3EH1	0.1 μm	254 / 10	3	Teflon encapsulated Viton
ABD1UND3EH1	40 nm	254 / 10	3	Teflon encapsulated Viton
ABD1UND8EH1	40 nm	254 / 10	8	Teflon encapsulated Viton
ABD1UNM3EH1	20 nm	254 / 10	3	Teflon encapsulated Viton
ABD1UNM8EH1	20 nm	254 / 10	8	Teflon encapsulated Viton

³ The above filter configurations are also available in 508 mm / 20 in, 762 mm / 30 in, and 1016 mm / 40 in lengths. These can be ordered by changing the fourth digit in the part number to a 2, 3, or 4 respectively.

⁴ Other O-ring materials are available.

Unit conversion: 1 bar = 100 kilopascals



Microelectronics

25 Harbor Park Drive
Port Washington, New York 11050

1.800.360.7255 toll free (only in US)
1.516.484.5400 phone
1.516.625.3610 fax
microelectronics@pall.com

Filtration. Separation. Solution.SM

Visit us on the Web at www.pall.com/micro

Pall Corporation has offices and plants throughout the world.

© Copyright 2007 Pall Corporation. Pall, , and Ultiplex are trademarks of Pall Corporation. ® Indicates a Pall trademark registered in the USA. *Filtration. Separation. Solution.SM* is a service mark of Pall Corporation.